

EXPRESS NAILS




Fast and economical hardened spring steel fixing.

Ideal for use as a through fixing for battens, frames, brackets, profiles etc. The spring steel tensions over the entire length of the drill hole and fixture is held in place by the steel collar.

Simple and easy to use, temperature and corrosion resistant. Suitable for use in concrete, stone, solid brick, masonry and light construction materials.

| Code | Description | tfix | Lt | do | h1 | hnom |
|-----------|--------------------------|------|-----|----|----|------|
| EXPN06040 | 6X40 EXPRESS NAIL YPASS | 10 | 40 | 6 | 40 | 30 |
| EXPN06050 | 6X50 EXPRESS NAIL YPASS | 20 | 50 | 6 | 40 | 30 |
| EXPN06060 | 6X60 EXPRESS NAIL YPASS | 30 | 60 | 6 | 40 | 30 |
| EXPN06080 | 6X80 EXPRESS NAIL YPASS | 50 | 80 | 6 | 40 | 30 |
| EXPN06100 | 6X100 EXPRESS NAIL YPASS | 70 | 100 | 6 | 40 | 30 |
| EXPN08070 | 8X70 EXPRESS NAIL YPASS | 30 | 70 | 8 | 50 | 40 |
| EXPN08090 | 8X90 EXPRESS NAIL YPASS | 50 | 90 | 8 | 50 | 40 |
| EXPN08110 | 8X110 EXPRESS NAIL YPASS | 70 | 110 | 8 | 50 | 40 |
| EXPN08130 | 8X130 EXPRESS NAIL YPASS | 90 | 130 | 8 | 50 | 40 |
| EXPN08150 | 8X150 EXPRESS NAIL YPASS | 110 | 150 | 8 | 50 | 40 |
| EXPN08180 | 8X180 EXPRESS NAIL YPASS | 140 | 180 | 8 | 50 | 40 |

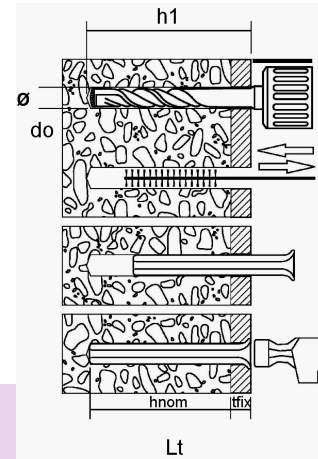

TECHINICAL DATA

| Recommended Loads | |
|-------------------|-------|
| EXPN 6.0 | 0.7kN |
| EXPN 8.0 | 1.0kN |

| | |
|------|---------------------------------------|
| Tfix | Thickness of fixture (mm) |
| L | Anchor body length (mm) |
| do | Drill hole diameter (mm) |
| h1 | Depth of drilled hole deep point (mm) |
| hnom | Anchor Embedment depth (mm) |

All dimensions in mm, unless otherwise stated.

SUPPLY LTD